




GAPA


MATS - CLEANING ZONES



ZONE 1



ZONE 2



ZONE 3



CLEANING ZONES


Purpose of cleaning zones

- As much as 90 % of all dirt and humidity, which would otherwise be dragged into the building, is absorbed by passing across the cleaning zone
- It saves up to 65 % of maintenance costs and at the same time, significantly reduces wear and tear and therefore extends the service life of flooring
- High efficiency
- Less dirt inside
- Easy cleaning and maintenance
- Optimal cleaning costs
- Representative appearance of your entrance
- Protection against slipping



Efficiency of our mats is proved by the certificates issued by the Technical Testing Institute in Prague - Prosek (TZÚS). GAPA MB s.r.o. is a company certified in accordance with ISO 9001.

ZONE 1

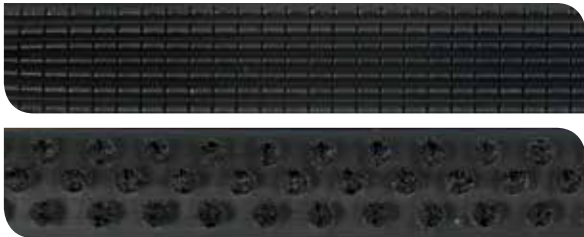

External – for coarse dirt trapping

TOPWELL 27 mm, TOPWELL 22 mm, TOPWELL 17 mm in all three variants standard, extra, super, TENWELL standard, extra, OPENWELL 28 / 22 / 18 mm, LAWELL in a rubber design, BRUSHWELL, BRUSHWELL LOGO, KARWELL, OKTAVA, ŠKRABÁK, CLEANBOX, RINWELL, OUTWELL, SANITNESS, RUBBER BRUSH, STYLE

ZONE 2



External – for finer dirt trapping

TOPWELL 27 mm, TOPWELL 22 mm, TOPWELL 17 mm in two variants standard and extra, TENWELL standard, extra, LAWELL in textile design, BRUSHWELL, BRUSHWELL LOGO, KARWELL, OKTAVA, RINWELL, HARDWELL, SHATWELL, CATWELL, CLEANWELL-ATRIUM, FANWELL, KOKOS, STYLE

ZONE 3



Internal – for final cleaning of fine dirt and humidity

SHATWELL, CATWELL, CATWELL-LOGO, CLEANWELL, CLEANWELL-ATRIUM, ATRIUM-LOGO, FANWELL, FANWELL-LOGO, KOKOS



The base of the **TOPWELL STANDARD** and **EXTRA** mats is made from 27 mm wide aluminium sections, connected by a stainless steel cable and separated by rubber intermediate rings allowing mat rolling up for better handling during the cleaning. Rubber, textile or brush bands are fixed to aluminium sections.

Individual fillings can be combined at random and replaced after wearing off.

The TOPWELL STANDARD mat with rubber filling can be used for escape routes and it is certified in accordance with EN 13501-1 + A1:2010. Response to fire classification: Bfl-s1

Application: for very busy and heavily loaded entrances of shopping centres and department stores. Entrances of hotels, banks and restaurants

Rubber



Textile black – 1



Textile grey – 2



Textile dark blue – 4



Textile yellow – 5



Textile dark brown – 7



Nop dark blue – 1145



Nop yellow – 1105



Nop dark brown – 1110



Brush 3 – black



Brush 3 – grey



Brush 3 – dark brown



TOPWELL STANDARD



27 mm



22 mm




17 mm

Height: 27 mm / 22 mm / 17 mm

Dimensions: according to the client's requirements

Design: rubber / textile

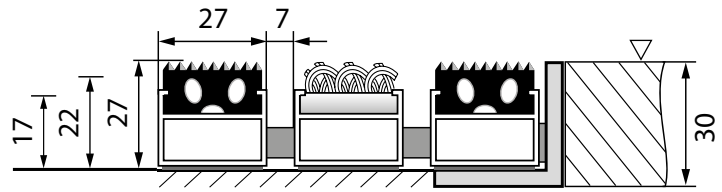

TOPWELL EXTRA



27 mm



22 mm




17 mm

Height: 27 mm / 22 mm / 17 mm

Dimensions: according to the client's requirements

Design: rubber / textile / brush 3 / aluminium scraper / brush 1

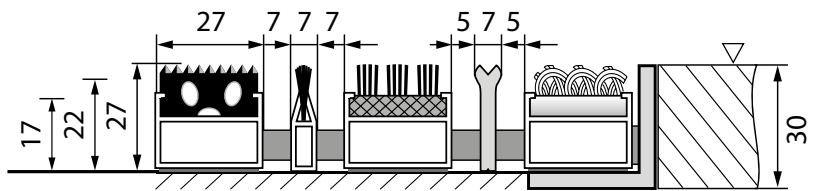

TOPWELL SUPER




27 / 22 / 17 mm


Height: 27 mm / 22 mm / 17 mm

Dimensions: according to the client's requirements

Design: brush sections

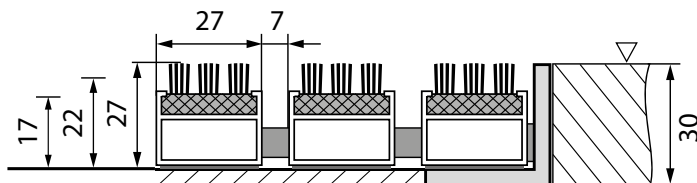

TOPWELL WIDE

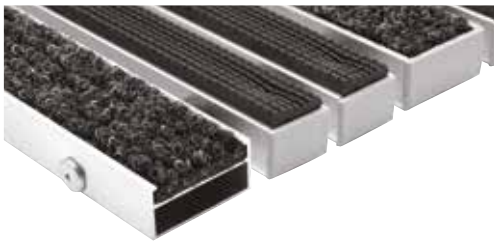


The base of the Topwell 22 mm wide mat is made from aluminium sections with the width of 41 mm to which textile bands are fixed. This type can be combined with Topwell 22 mm standard as well as extra mats.

This type of mat is intended for interior use and can also be produced with a logo which is inserted into individual aluminium sections. The logo can be provided in textile or nap variant according to our colour sample book.

Height: 22 mm

Dimensions: according to the client's requirements


Design: rubber / textile / brush 3 / aluminium scraper



TENWELL



STANDARD

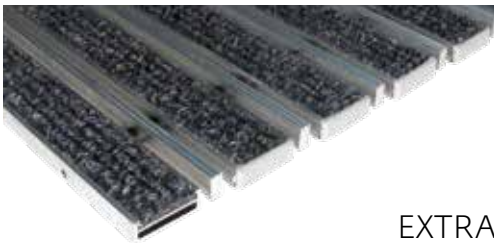


EXTRA

Height: 10 mm

Dimensions: according to the client's requirements

Design: rubber / textile / aluminium scraper




OPENWELL




Height: 28 mm / 22 mm / 18 mm

Dimensions: according to the client's requirements

Resistance: not suitable for crossing by shopping carts and pallet trucks

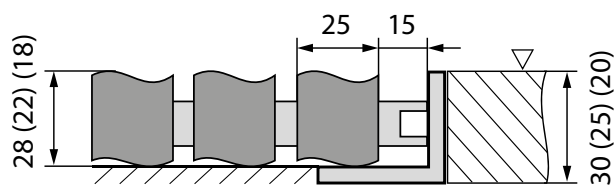


LAWELL

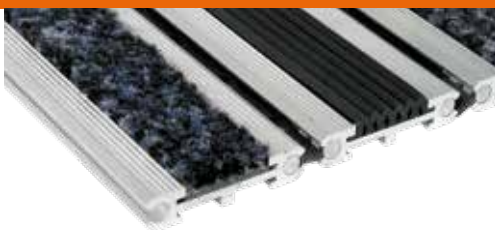

Height: 14 mm

Dimensions: according to the client's requirements

Resistance: loading up to 12.5 / 100 cm², the mat is suitable for a high loading such as vehicle and pallet truck travelling

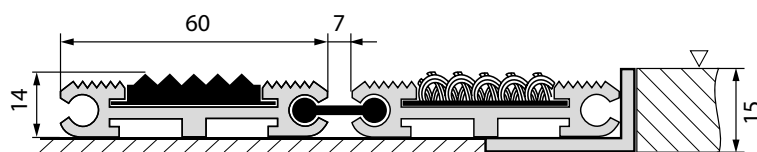

BRUSHWELL




Height: 22 mm

Dimensions: according to the client's requirements

Resistance: loading up to 12.5 / 100 cm²

Application: entrances to hotels, banks, restaurants, administration buildings, entrances to tennis courts, golf courses, but it can be used also in front of family houses

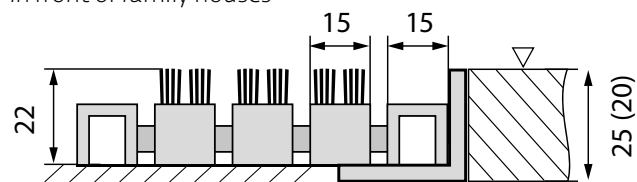


KARWELL



Height: 23 mm

Dimensions: according to the client's requirements, basic module size 150 x 100 cm

Resistance: suitable for any load

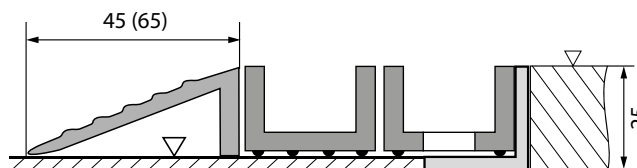


OUTWELL



Height: 18 mm

Dimensions: according to the client's requirements

Application: entrances to hotels, banks, restaurants, administration buildings, but also in front of family houses

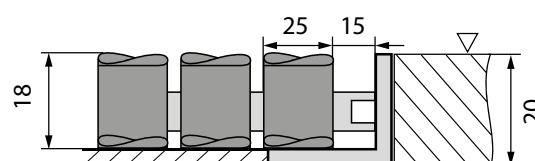


OKTAVA



Height: 12.5 mm

Dimensions: according to the client's requirements, basic module size 150 x 100 cm

Application: entrances to car showrooms, shopping centres, administration buildings and ski centres (ski lift platforms), etc.




ŠKRABÁK




Design: galvanizing

Mesh dimensions: 30 x 10 mm

Installation: on the floor level into a beforehand prepared hole fitted with recessed frame or freely laid on the floor

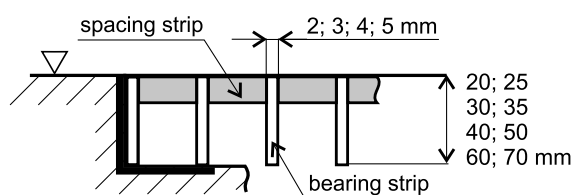


CLEANBOX

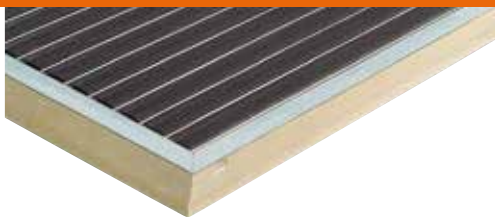


Height: 8 mm

Dimensions: 60 x 40 cm, 75 x 50 cm, 100 x 50 cm

Material: polymer concrete box with galvanized edge

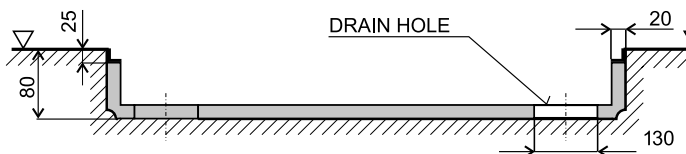


ALWELL

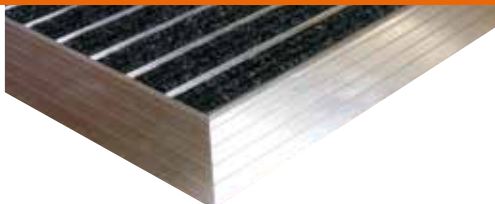

Height: 17 mm

Dimensions: 70 x 45 cm with leading frame

Resistance: entrances to family houses, offices and terraces



TEXTILE MATS

They represent an ideal solution for cleaning zones 2 and 3. They are designed for large areas with heavy and permanent use where penetration of fine dirt and humidity into the building should be avoided. All textile mats have an excellent absorption ability, they ensure perfect cleaning and they are resistant to abrasion. Mats with logo comply with all demands as a cleaning zone and they will also emphasize the entrance into premises.

HARDWELL



Height: 18 mm

Material: Rubber sections with polyamide fillings, firmly connected with aluminium sections

Colour: grey, black

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 20 / 30 / 3 mm or freely placed on the floor with 65 mm wide aluminium leading frame

RINWELL



Height: 10 mm

Material: PVC / PP

Colour: black, red

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 10 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar

SHATWELL



Height: 16 mm

Material: 100 % polypropylene, PVC base

Colour: black / white or brown / white highlight, grey

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 15 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar

ATRIUM LOGO



Height: 8.5 mm

Material: dyed nylon embedded into the 100 % nitrile-rubber base

Colour: basic selection out of 60 colours according to the colour sample book, the colours can be adapted to the required shade according to the customer's request

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 10 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar

CLEANWELL ATRIUM



Height: 9 mm

Material: 100 % PA_{6,6}; PVC base

Colour: black, brown, grey, red, blue, green highlight

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 10 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar

CLEANWELL



Height: 9 mm

Material: 100 % polyamide, Vinyl base

Colour: black / white or brown / white highlight

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 10 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar

CATWELL – LOGO



Height: 15 mm

Material: 100 % polypropylene, rubber base

Colour: 1 - black, 2 - grey, 3 - light blue, 4 - dark blue, 5 - yellow, 6 - ebony, 7 - dark brown, 8 - light green, 9 - sea green, 10 - red. A colour sample book can be sent on request.

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 15 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar

FANWELL



Height: 11 mm

Material: 100 % polypropylene, MFL ED

Colour: 10 colours available

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 10 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar

FANWELL LOGO



Height: 11 mm

Material: 100 % polypropylene, MFL ED

Colour: 10 colours available according to colour sample book

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 10 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar

KOKOS



Height: 10 mm

Material: 100% polypropylene

Colour: sand, black

Installation: on the floor level into a beforehand prepared hole fitted with Al frame 10 / 30 / 2 mm or freely placed on the floor with 2 cm wide rubber bar or 45 mm leading frame

MAT FRAMES

Frames for embedding into floor

Design and dimensions (height / width / thickness): **aluminium** - 10 / 30 / 2, 15 / 30 / 2, 13 / 30 / 3, 20 / 30 / 3, 25 / 25 / 3, 30 / 30 / 3 mm, **stainless steel** - 20 / 20 / 3, 25 / 25 / 3, 30 / 30 / 3 mm

Aluminium




Stainless steel




Extra strong frame for embedding

Massive aluminium section where an anchoring component can be used and embedded into the basement

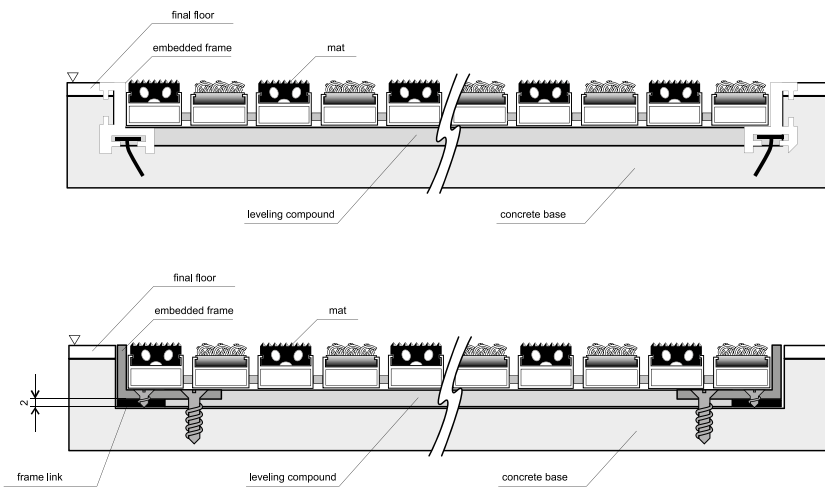

OVERVIEW OF EMBEDDED FRAMES






Aluminium design



HEIGHT	WIDTH	THICKNESS
30	30	3 mm
25	25	3 mm
20	30	3 mm
15	30	2 mm
13	30	3 mm
10	30	2 mm

Tapered frames

Design and dimensions: aluminium - 45 / 10, 45 / 20, 65 / 16, 65 / 20 mm

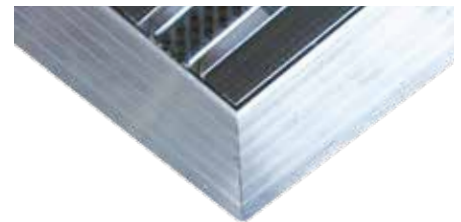

Rubber tapering

For Karwell



For textile mats





GAPA MB, s. r. o. | Svatovítká 217 | 293 01 MLADÁ BOLESLAV
Tel. / fax: +420 326 735428, +420 326 721006 | e-mail: info@gapa.cz

www.gapa.cz